

SA-202CD Oil-less Cabinet Type Air Compressor






SA-202CD Silent Cabinet Oil-less Air Compressor

SA-202CD無油式空壓機



Oil-less Air Compressor With Detachable Air Dryer

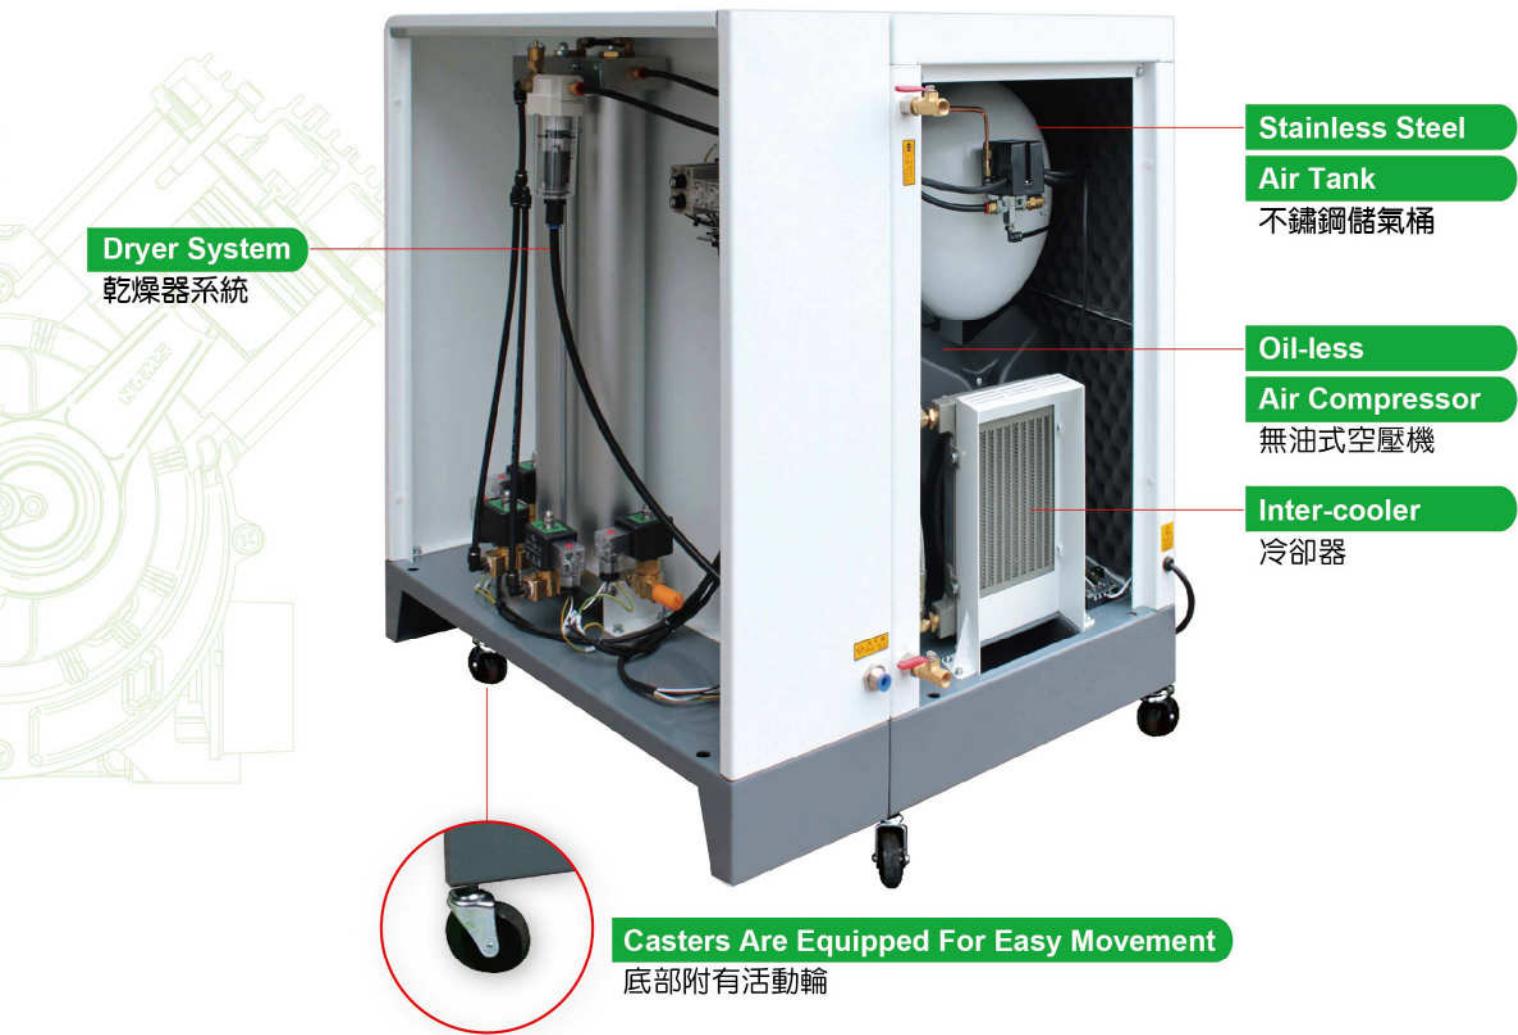

Model 型式	Specs. 規 格	Motor (kw/hp) 馬 達		Max. Working Pressure (kg/cm ² .g) 最高使用壓力	Dew Point (°C) 露點溫度	F.A.D. (l/min) 實際排氣量		Noise Level dB(A) 噪音值		Tank Capacity (liter) 儲氣桶容量	Dimension LxWxH (mm) 尺 寸	Weight (kg) 重 量
		50HZ	60HZ			50HZ	60HZ	50HZ	60HZ			
SA-202CD		1.5	2	10	-40 (Opt.)	100	100	62	64	21	775X700X870	150

Absolutely Clean Air

絕對清淨的空氣。高信賴度，更耐用



Dual-tube Absorptive Air Dryer System

- The molecular sieves that inside the tubes are purged by the compressed air generated by SA-202CD itself, which enable molecular sieves to be refreshable to save maintenance cost.
- Absorptive air dryer system together with high efficient inter-cooler and auto-drain device enable to keep dew point to be stably at -40°C, which meets the requirements from industries.

雙管吸附式乾燥系統

- 用空壓機的壓縮空氣風乾乾燥器內分子篩，使分子篩可循環使用延長壽命，節省維護費用。
- 新式乾燥器搭配效能佳冷卻器及自動濾水器，有效的讓露點達到-40°C，適用於各種產業。



Oil-less Air Compressor

- No lubricant is needed, offering clean compressed air.
- No waste oil treatment needed.
- No oil pollution.

無油式空壓機

- 免加潤滑油，供應潔淨氣源。
- 不須處理廢油，無油汙問題。

1) Control System

- High reliable components: pressure switch, check valve, pressure gauge, safety valve.
- Easy operation and equipped with running-hours meter to predict the maintenance time in advance.

● 控制系統元件

- 採用高信賴度組件：壓力開關、逆止閥、壓力錶、安全閥。
- 簡潔的操作面板附有累時計，易於執行預防保養。

2) Oil-less Air Compressor

- With high quality and reliable components.
- Air pump and air tank are equipped with anti-vibration pads to achieve low vibration while operating.
- High efficient motor with over-current protector.
- Air discharge tube is made of stainless steel.

● 無油式空壓機

- 高品質、高信賴度組件。
- 低震動、機體及儲氣桶，附有緩衝墊吸震效果佳。
- 馬達效率高，附有電流保護開關。
- 排氣管採用不銹鋼軟管。

3) Dryer System

- With high efficient inter-cooler, auto-drain device, absorptive air dryer to achieve dry, clean and oil-less air.
- Without refrigerant, no environmental pollution.

● 乾燥器系統

- 採用效能佳中間冷卻器及自動濾水器，搭配雙管吸附式再生乾燥器達到幾乎無水分的潔淨空氣。
- 不使用冷媒，無環境汙染。

4) Stainless Steel Air Tank

- Air tank is made of stainless steel to avoid rusting.
 - Equipped with safety valve to ensure safe operation.
- ### ● 不鏽鋼儲氣桶
- 採全不鏽鋼材質之儲氣桶，免去生鏽的疑慮。
 - 裝有安全閥，確保使用安全。

5) The Combination Cabinet Structure

- Air compressor and air dryer are detachable, which provides flexible choice for your air requirement.
- Powder coating to create exquisite and long-lasting appearance.
- With high grade fireproof sound-absorbing material and anti-vibration structure to achieve low-noise, low-vibration.
- With high performance cooling fan and deflectors to effectively cool down the components inside and ensure durable operation.
- Equipped with casters for easy movement.

● 組合式箱體結構

- 組合式的箱型設計，可依需求分開購買乾燥機器、空壓機。
- 粉體塗裝，外觀精美耐用。
- 採用高密度防火吸音材及防震結構，運轉低噪音、低震動。
- 採用效能佳吸、排冷卻風扇，強制冷卻機體，確保組件壽命。
- 底座附有活動輪，易於搬運移動。

SA-202CD

Absolutely Clean Air Much More Reliable And Durable

絕對清淨的空氣
高信賴度，更耐用



Since 1956
www.swanair.com.tw



東正鐵工廠股份有限公司

TONG CHENG IRON WORKS CO., LTD.

公 司：40144 台中市東區信義街116號

TEL:886-4-2261-2135 FAX:886-4-2261-5465

廠 址：40242 台中市南區大慶街二段16號

TEL:886-4-2261-2135 FAX:886-4-2262-8246

台北營業所：24888 新北市五股區五權五路43號

TEL:02-2299-1285 FAX:02-2298-2296

台中營業所：40424 台中市南區大慶街二段16號

TEL:04-2261-2135 FAX:04-2261-5465

台南營業所：71045 台南市永康區中正南路635號

TEL:06-253-9848 FAX:06-253-9849

Head Office :

No. 16, Ta Chin St. Sec. 2, Taichung, Taiwan, 40242

TEL:886-4-2261-2135 FAX:886-4-2262-8246

TC201906AB